



Model DS113

Tripod Turnstile

Tripod turnstile DS113 have enough provision to install reader on top or inside, which can be integrated with any kind of third-party access control system (e.g.: RFID, QR, fingerprint and biometric reader device).

Only one person can pass at one time, highest security to prevent the illegal trailing.

Features


- Two way or one way working.
- Enough provision for install any reader.
- Support integrated with any type of access control systems.
- Lower power consumption.
- Low noise, system runs smoothly.
- Green and red LED indicator display passing status.
- IP65 waterproof level, indoor/outdoor use.
- Fire safety requirements, arms drop down automatically.
- Easy to install and maintain.
- 3 years warranty support.

Customized service

- Appearance color can be customized based on installation environment.
- Dimensions can be customized to meet your request.
- Logo can be customized.
- Picture: high resolution and 3D renderings pictures can be customized




Logo Custom

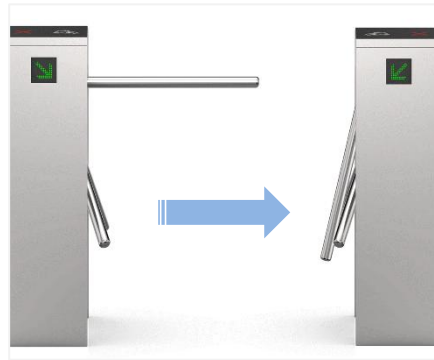

Arms Drop Down



Waterproof

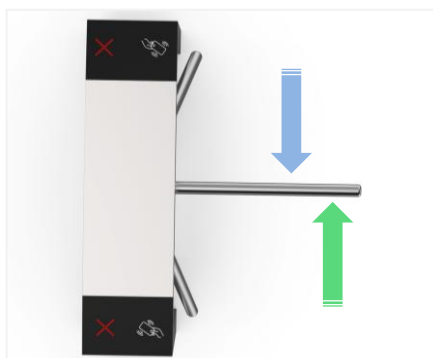

Single/Bi-directional Selectable



LED Light




Anti-trailing Function:
one person can pass at one

Access Control System

Daosafe turnstile gates can be well integrated with any 3rd party access control systems



Card Solution



QR/Bar Code Solution



Biometric Solution



Remote Control



Touchless Button



Card



QR Code



Fingerprint



Face



Palm Vein

DS113 with card solution installed at airport

55 A 63
Portes - Gates




Specifications


Model No.	DS113
Type	Tripod Turnstile
Brand	Daosafe
Framework Material	304 Full Stainless Steel Black tempered glass
Arm material	304 Stainless Steel
Dimension	1000*270*1000mm
Net Weight	50kg/pcs
Passage Width	550mm
Passing Direction	Single directional/Bi-directional
MCBF	10 million
Power Supply	AC220V/110V, 50/60Hz
Operation Voltage	24V DC
Power Consumption	40W
Operation Temperature	-20 °C - 75 °C
Operation Humidity	0 ~ 95% (No freeze)
Working Environment	Indoor/Outdoor
Flow Rate	35 people per minute
LED Indicator	Two LED indicators on top: green → entry, red × no entry
Communication	Dry contact, Relay signal, RS485
Emergency	Arms will drop down automatically
Flexibility	Integrate with any access control




Dimensions

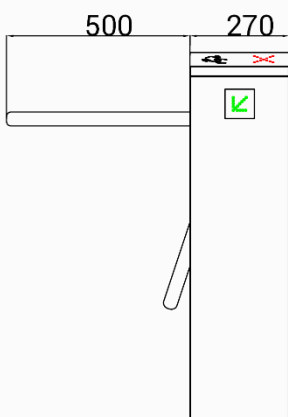

Front View

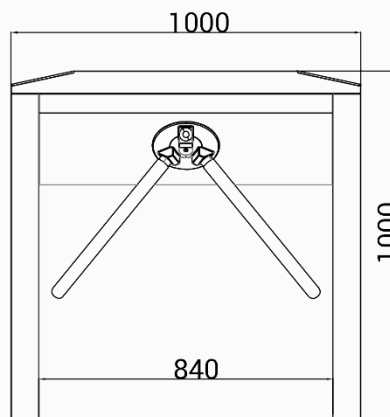

Side View

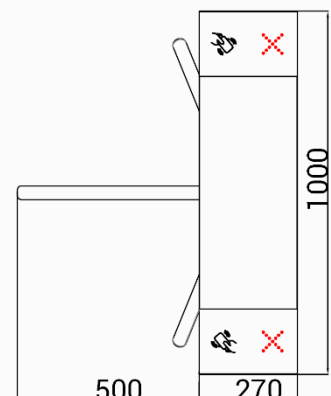

Top View